

OPERATION STEP




DVD Player



PC



MP3/MP4

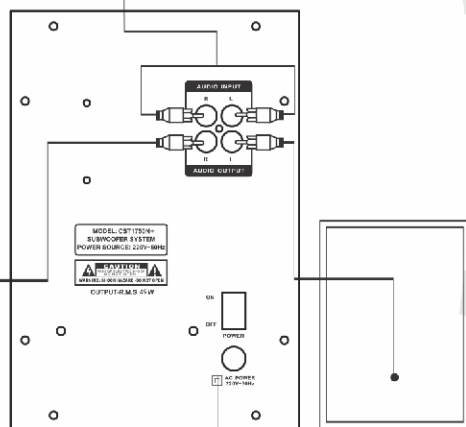

Previous Play Next

FUNCTION & SPECIFICATION



Volume

Bass

Treble

SPECIFICATION

• Output RMS	49W
• Input Impedance	47KΩ
• Signal-to-Noise Ratio	≥65dB (at 60Hz-18KHz)
• Frequency Response	
- Subwoofer	20Hz-200Hz
- Satellite Speaker	100Hz-20Hz
• Speaker Unit	
- Woofer	4"/4Ω
- Satellite	3"/4Ω
• Power Input	AC 220V-50Hz
• Dimension	
- Subwoofer	W170XH240XD270 mm
- Satellite	W113XH170XD124 mm
• Function	Control volume, treble, bass on the subwoofer panel Plug & play music from Flash Drive / MMC Card / SD Card

WARNING

Don't place the product in the high temperature.
Moist and place the product on a secure, stable surface.
The product can cause serious damage if it fall.

Never open the product by yourself. It is an electrical shock hazards.

If the repair is needed, It should be done by qualified electrician.

Take out all power cords immediately and do not use the product if damaged or water enter into the product with carelessness.

Do not maximize the volume when it is connected with the eqipment which has output power. It causes sound it dispropotion.

Use the product only in indoor.

Unplug the product only in indoor.

Unplug the power outlet, if you won't use more than two days.



MANUAL BOOK

CST 1750N+

Active Multimedia Subwoofer System



MUSIC PLAYER



N
SERIES

simbadda
Active Multimedia Subwoofer System